

# $\mu$ -ROC

## OEM Femtosecond Autocorrelator

ROC stands for Row Optical Correlator. Based on an ultra compact and robust inline setup, the  $\mu$ -ROC takes the ROC concepts to its limit for the measurement of single-shot autocorrelation traces in the smallest housing footprint ever. Based on the latest patented design from Femto Easy, leveraging several years of experience in the single-shot ultrafast instrumentation, the  $\mu$ -ROC is specifically designed for OEM direct integration into laser heads or laser systems.



### Key features

- ◆ Ultra compact, and non sensitive to alignment, can be used as a simple camera
- ◆ Robust design, no moving parts. Non sensitive to vibrations
- ◆ Directly powered by the USB cable, no power supply required
- ◆ Suitable for any repetition rate. Single-pulse extraction possible up to 100 kHz laser repetition rate (with Trigger option)
- ◆ User-friendly and powerful software. REST API for standard software integration using simple HTTP requests

### Options


- ◆ Trigger
- ◆ Enhanced detection

# Specifications

µ-ROC Models		Ti:Sa	Yb	Yb-s
Pulse duration range (fs)	min	20 - 50 <sup>1</sup>	50 - 150 <sup>1</sup>	25 - 50 <sup>1</sup>
	max	500	1500	1000
Accessible spectral range (nm)		700 - 900		1020 - 1080
Input pulse repetition rate		any		
Single-pulse measurement		up to 100 kHz laser repetition rate (with Trigger option, 50 kHz without)		
Min input pulse energy <sup>2</sup>	Single-shot	25 µJ	5 µJ	
	1 MHz	100 nJ	10 nJ	
	100 MHz	5 nJ	0.5 nJ	
Input polarization		linear horizontal or vertical		
Detection		CMOS 12 bits		
PC Interface		USB 3.1		
Beam height (mm)		20		
Dimensions (mm)		30 x 40 x 45		

<sup>1</sup> The two minimum pulse duration values correspond to the Fourier limited pulse duration with and without GDD precompensation.

<sup>2</sup> Those values give an order of magnitude. The exact sensitivity depends on many parameters (pulse duration, beam profile, wavelength...)

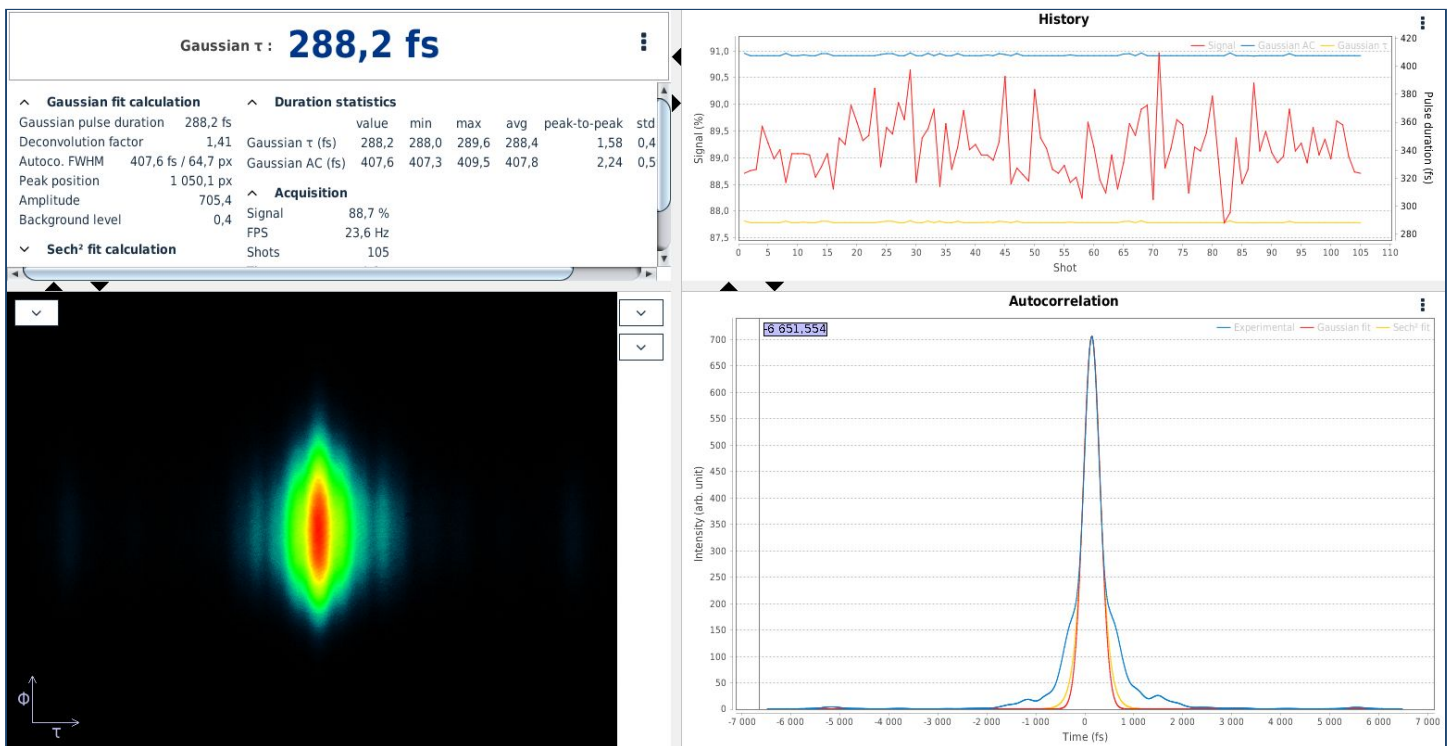

- ◆ Live extraction of shot to shot pulse duration
- ◆ Different calculation methods available for proper pulse estimation (Raw data FWHM, Gaussian fit, sech2...)
- ◆ Enhanced background & hot pixels treatment, for optimum dynamic and signal to noise ratio
- ◆ Client / Server interface, and REST API for the easiest integration
- ◆ All data exportable into most common formats